

Q401.001
1992-2001 Yamaha YFB250
Timberwolf
STAGE 1

For mildly tuned machines using the stock airbox, with stock or aftermarket filter. May also be used with a good aftermarket exhaust system. K&N Filter # YA-2597.

PARTS LIST		
1	Main Jet	DJ074
1	Main Jet	DJ078
1	Main Jet	DJ082
1	Fuel Needle	DNO140
1	Adjusting Washer	DW0001
1	E-Clip	DE0001

STAGE ONE INSTRUCTIONS

1. Unscrew top carb plate. Disconnect throttle cable and remove slide.(Fig. A).
2. Install Dynojet needle on groove# 3 for applications below 5000 feet, groove #2 for above 5000 feet, using all stock spacers. Install the Dynojet washer above the E-clip.
3. Remove stock main jet. Use the DJ082 below 3000 feet, DJ078 from 3000 to 6000 feet and DJ074 above 6000Feet. Be sure that the jet you are changing is the main jet.
4. Locate the Fuel Mixture Screw (Fig. B). Using a flat blade screwdriver, turn the mixture screw clockwise until it seats, then turn out 1 turn below 5000 feet or 1/2 above 5000 feet.





Fig. A

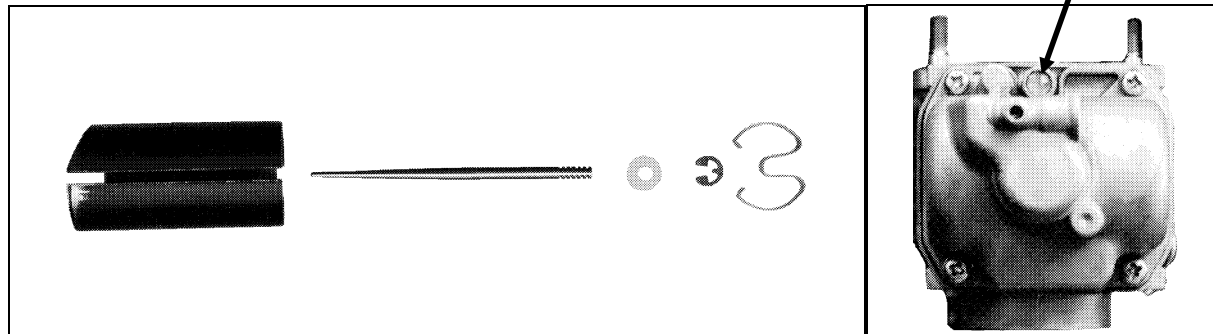

This is the Fuel Mixture Screw

Fig. B